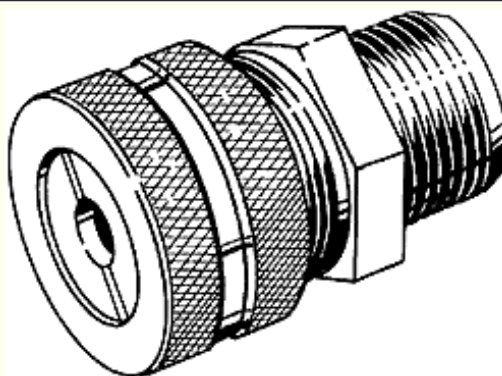


Products

- › [Index](#)
- › [Featured Products](#)
- › [Cross Reference](#)
- › [UPC Search](#)

Product Datasheet

[Catalog Home](#)[Home Page](#)[Search](#)**4802-8 -- Aluminum Cord Grip Connector .625 - .750 1/2" Hub**

Product Specifications

Family	Liquidtight Conduit and Cord Connectors
Fittings Classification	Aluminum Strain Relief Cord Connectors
Sub Class	1/2" Hubs form3
Trade Size	1/2"
Cable Range	.625 - .750
Standard Packaging	Polybag
Ship Carton Length	8.25
Ship Carton Width	5.00
Ship Carton Height	4.00
WT. PER HU.	13.9
Dimension A	1.38"
Dimension B	.55"
Dimension C	1.50"
Dimension D	.64"
Dimension E A/C	1.40"
Dimension E A/F	1.25"
Unit Carton Quantity	15
Ship Carton Quantity	15
UPC Number	050169480281

Applications

- For use in wet or dry locations to provide a liquidtight and strain relief termination for flexible cord and cable
- Aluminum liquidtight strain relief cord connectors are suitable for use in Class 1, Division 2; Class 2, Division 1 and 2; and Class 3, Division 1 and 2 hazardous locations

Product Features

- Aluminum construction provides a corrosion-resistant installation
- Patented Gotcha® ring incorporates a split hinge design to prevent friction and to provide strain relief
- Neoprene grommet
- Knurled compression nut allows the fittings to be hand tightened to UL requirements
- Gotcha® ring is color-coded for sizing identification

Compliances

UL CSA

