


## Products

- › [Index](#)
- › [Featured Products](#)
- › [Cross Reference](#)
- › [UPC Search](#)

## Product Datasheet

[Catalog Home](#)[Home Page](#)[Search](#)

## 4802-9 -- Aluminum Cord Grip Connector .750 - .875 1/2" Hub

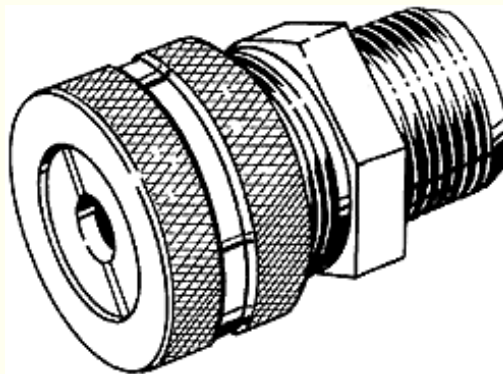

### Product Specifications

|                                |                                         |
|--------------------------------|-----------------------------------------|
| <b>Family</b>                  | Liquidtight Conduit and Cord Connectors |
| <b>Fittings Classification</b> | Aluminum Strain Relief Cord Connectors  |
| <b>Sub Class</b>               | 1/2" Hubs form3                         |
| <b>Trade Size</b>              | 1/2"                                    |
| <b>Cable Range</b>             | .750 - .875                             |
| <b>Standard Packaging</b>      | Carton                                  |
| <b>Ship Carton Length</b>      | 8.25                                    |
| <b>Ship Carton Width</b>       | 5.00                                    |
| <b>Ship Carton Height</b>      | 4.00                                    |
| <b>WT. PER HU.</b>             | 13.9                                    |
| <b>Dimension A</b>             | 1.38"                                   |
| <b>Dimension B</b>             | .55"                                    |
| <b>Dimension C</b>             | 1.50"                                   |
| <b>Dimension D</b>             | .64"                                    |
| <b>Dimension E A/C</b>         | 1.40"                                   |
| <b>Dimension E A/F</b>         | 1.25"                                   |
| <b>Unit Carton Quantity</b>    | 15                                      |
| <b>Ship Carton Quantity</b>    | 15                                      |
| <b>UPC Number</b>              | 050169480298                            |

### Applications

- For use in wet or dry locations to provide a liquidtight and strain relief termination for flexible cord and cable
- Aluminum liquidtight strain relief cord connectors are suitable for use in Class 1, Division 2; Class 2, Division 1 and 2; and Class 3, Division 1 and 2 hazardous locations

### Product Features

- Aluminum construction provides a corrosion-resistant installation
- Patented Gotcha® ring incorporates a split hinge design to prevent friction and to provide strain relief
- Neoprene grommet
- Knurled compression nut allows the fittings to be hand tightened to UL requirements
- Gotcha® ring is color-coded for sizing identification

### Compliances

UL CSA

