

Products


- > [Index](#)
- > [Featured Products](#)
- > [Cross Reference](#)
- > [UPC Search](#)

Product Datasheet

[Catalog Home](#) [Home Page](#)

[Search](#)

4803-2 -- Aluminum Cord Grip Connector .187 - .250 3/4" Hub

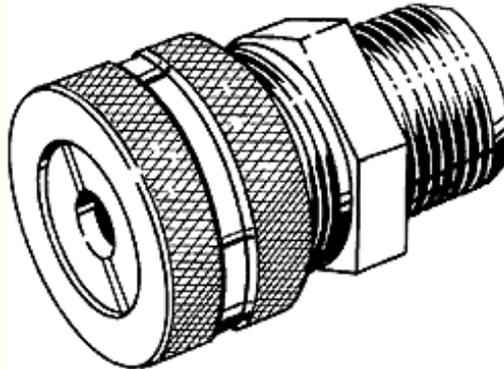

Product Specifications

Family	Liquidtight Conduit and Cord Connectors
Fittings Classification	Aluminum Strain Relief Cord Connectors
Sub Class	3/4" Hubs form2
Trade Size	3/4"
Cable Range	.187 - .250
Standard Packaging	Carton
Ship Carton Length	8.25
Ship Carton Width	5.00
Ship Carton Height	4.00
WT. PER HU.	12.1
Dimension A	1.13"
Dimension B	.55"
Dimension C	1.10"
Dimension D	.64"
Dimension E A/C	1.29"
Dimension E A/F	1.13"
Unit Carton Quantity	25
Ship Carton Quantity	25
UPC Number	050169480328

Applications

- For use in wet or dry locations to provide a liquidtight and strain relief termination for flexible cord and cable
- Aluminum liquidtight strain relief cord connectors are suitable for use in Class 1, Division 2; Class 2, Division 1 and 2; and Class 3, Division 1 and 2 hazardous locations

Product Features

- Aluminum construction provides a corrosion-resistant installation
- Patented Gotcha® ring incorporates a split hinge design to prevent friction and to provide strain relief
- Neoprene grommet
- Knurled compression nut allows the fittings to be hand tightened to UL requirements
- Gotcha® ring is color-coded for sizing identification

Compliances

UL CSA

