


Products

- › [Index](#)
- › [Featured Products](#)
- › [Cross Reference](#)
- › [UPC Search](#)

Product Datasheet

[Catalog Home](#)[Home Page](#)[Search](#)

4804-5 -- Aluminum Cord Grip Connector 1.000 - 1.125 1" Hub

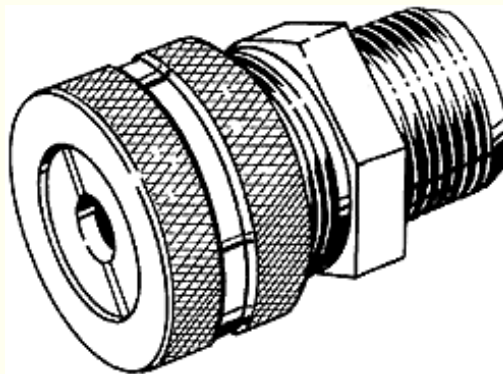

Product Specifications

Family	Liquidtight Conduit and Cord Connectors
Fittings Classification	Aluminum Strain Relief Cord Connectors
Sub Class	1" Hubs form4
Trade Size	1"
Cable Range	1.000 - 1.125
Standard Packaging	Carton
Ship Carton Length	8.25
Ship Carton Width	5.00
Ship Carton Height	4.00
WT. PER HU.	23.1
Dimension A	1.75"
Dimension B	.71"
Dimension C	1.60"
Dimension D	1.02"
Dimension E A/C	1.81"
Dimension E A/F	1.62"
Unit Carton Quantity	10
Ship Carton Quantity	10
UPC Number	050169480458

Applications

- For use in wet or dry locations to provide a liquidtight and strain relief termination for flexible cord and cable
- Aluminum liquidtight strain relief cord connectors are suitable for use in Class 1, Division 2; Class 2, Division 1 and 2; and Class 3, Division 1 and 2 hazardous locations

Product Features

- Aluminum construction provides a corrosion-resistant installation
- Patented Gotcha® ring incorporates a split hinge design to prevent friction and to provide strain relief
- Neoprene grommet
- Knurled compression nut allows the fittings to be hand tightened to UL requirements
- Gotcha® ring is color-coded for sizing identification

Compliances

UL CSA

