


Products

- › [Index](#)
- › [Featured Products](#)
- › [Cross Reference](#)
- › [UPC Search](#)

Product Datasheet

[Catalog Home](#)[Home Page](#)[Search](#)

3566 -- 45 Degree Liquidtight Connector Insulated 1-1/2" Trade Size

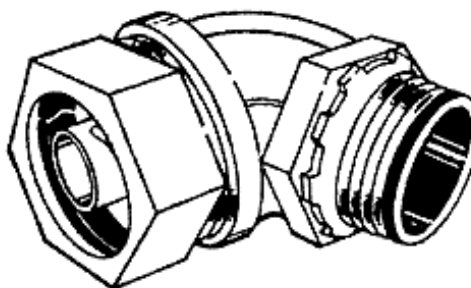

Product Specifications

Family	Liquidtight Conduit and Cord Connectors
Fittings Classification	Malleable Iron - 45 Degree Connectors
Sub Class	Insulated
Trade Size	1-1/2"
Standard Packaging	Carton
Ship Carton Length	7.375
Ship Carton Width	5.75
Ship Carton Height	4.75
WT. PER HU.	123.53
Dimension A	2-13/16"
Dimension B	47/64"
Thread Spec. B	1-1/2-11-1/2 NPT
Dimension C	4-1/4"
Dimension D	1-9/16"
Unit Carton Quantity	5
Ship Carton Quantity	5
UPC Number	050169035665

Applications

- For use in outdoor or indoor locations on flexible metallic liquidtight conduit and Type B flexible nonmetallic liquidtight conduit
- Use to positively bond the conduit to a box or enclosure
- RACO® liquidtight connectors are suitable for use in Class 1, Division 2; Class 2, Division 1 and 2; and Class 3, Division 1 and 2 hazardous locations

Product Features

- Patented split gland-ring is designed to slip onto the conduit

quickly and to grip the jacket of the conduit, speeding installation, assuring a perfect seal, and preventing pullouts

- Malleable iron castings mate with other components perfectly without strain or distortion
- All components are reusable -- RACO® liquidtight connectors may be easily disassembled and reused after years of service
- Sealing washer (included) provides a liquidtight seal when terminating the connector in a threadless opening
- Heavy duty locknut included with every RACO® liquidtight connector assures continuity of ground
- All metallic components are zinc electro plated for added corrosion protection
- Bodies - 3/8" to 2" Malleable Iron ; •Nuts - 3/8" to 1" Steel, 1-1/4" to 2" Malleable Iron

Compliances

UL CSA

