SIEMENS

Data sheet 3RW44 43-6BC34



SIRIUS SOFT STARTER, VALUES WITH 460 V, 50 DEG., STANDARD: 180A, 125HP, INSIDE-DELTA CIRCUIT 3: 312A, 250HP, 200-460 V AC, 115 V AC, SCREW TERMINALS

General technical data:				
product brand name		SIRIUS		
Product feature				
 integrated bypass contact system 		Yes		
Thyristors		Yes		
Product function				
 Intrinsic device protection 		Yes		
 motor overload protection 		Yes		
 Evaluation of thermistor motor protection 		Yes		
External reset		Yes		
 Adjustable current limitation 		Yes		
• inside-delta circuit		Yes		
Product component Motor brake output		Yes		
Equipment marking acc. to DIN EN 61346-2		Q		
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		G		

Product designation

soft starters for high feature applications

	_	
Operating current		
• at 40 °C rated value	Α	203
• at 50 °C rated value	Α	180
• at 60 °C rated value	Α	156
Operating current for three-phase motors at inside- delta circuit		
• at 40 °C rated value	Α	352
• at 50 °C rated value	Α	312
• at 60 °C rated value	Α	270
Mechanical power output for three-phase motors		
• at 230 V		
— at standard circuit at 40 °C rated value	W	55 000
— at inside-delta circuit at 40 °C rated value	W	110 000
• at 400 V		
— at standard circuit at 40 °C rated value	W	110 000
— at inside-delta circuit at 40 °C rated value	W	200 000
Yielded mechanical performance [hp] for three-phase	hp	50
AC motor at 200/208 V at standard circuit at 50 °C rated value	·	
Operating frequency rated value	Hz	50 60
Relative negative tolerance of the operating	%	-10
frequency		
Relative positive tolerance of the operating frequency	%	10
Operating voltage at standard circuit rated value	V	200 460
Relative negative tolerance of the operating voltage at standard circuit	%	-15
Relative positive tolerance of the operating voltage at standard circuit	%	10
Operating voltage at inside-delta circuit rated value	V	200 460
Relative negative tolerance of the operating voltage at inside-delta circuit	%	-15
Relative positive tolerance of the operating voltage at inside-delta circuit	%	10
Minimum load [% of IM]	%	8
Adjustable motor current for motor overload protection minimum rated value	Α	40
Continuous operating current [% of le] at 40 °C	%	115
Power loss [W] at operating current at 40 °C during operation typical	W	89
Control electronics:		
Type of voltage of the control supply voltage		AC
Control supply voltage frequency 1 rated value	Hz	50
Control supply voltage frequency 2 rated value	Hz	60

Relative negative tolerance of the control supply voltage frequency	%	-10
Relative positive tolerance of the control supply voltage frequency	%	10
Control supply voltage 1 at AC		
• at 50 Hz rated value	V	115
• at 60 Hz rated value	V	115
Relative negative tolerance of the control supply	%	-15
voltage at AC at 60 Hz		
Relative positive tolerance of the control supply	%	10
voltage at AC at 60 Hz		
Display version for fault signal		Display
Nechanical data:		
Width	mm	210
Height	mm	230
Depth	mm	298
Mounting type		screw fixing
Mounting position		with vertical mounting surface +/-90° rotatable, with
		vertical mounting surface +/- 22.5° tiltable to the front and back
Required spacing with side-by-side mounting		
• upwards	mm	100
• at the side	mm	5
• downwards	mm	75
Installation altitude at height above sea level	m	5 000
Wire length maximum	m	500
Number of poles for main current circuit		3
Connections/ Terminals:		
Type of electrical connection		
for main current circuit		busbar connection
 for auxiliary and control current circuit 		screw-type terminals
Number of NC contacts for auxiliary contacts		0
Number of NO contacts for auxiliary contacts		3
Number of CO contacts for auxiliary contacts		1
Type of connectable conductor cross-sections for		
main contacts for box terminal using the front		
clamping point		
 finely stranded with core end processing 		70 240 mm²
 finely stranded without core end processing 		70 240 mm²
• stranded		95 300 mm²
Type of connectable conductor cross-sections for		
main contacts for box terminal using the back		
clamping point		

 finely stranded with core end processing 		120 185 mm²
 finely stranded without core end processing 		120 185 mm²
• stranded		120 240 mm²
Type of connectable conductor cross-sections for		
main contacts for box terminal using both clamping		
points		
 finely stranded with core end processing 		min. 2x 50 mm², max. 2x 185 mm²
 finely stranded without core end processing 		min. 2x 50 mm², max. 2x 185 mm²
• stranded		max. 2x 70 mm², max. 2x 240 mm²
Type of connectable conductor cross-sections at		
AWG conductors for main contacts for box terminal		
using the back clamping point		250 500 kcmil
 using the front clamping point 		3/0 600 kcmil
using both clamping points		min. 2x 2/0, max. 2x 500 kcmil
Type of connectable conductor cross-sections for DIN cable lug for main contacts		
finely stranded		50 240 mm²
• stranded		70 240 mm²
Type of connectable conductor cross-sections for auxiliary contacts		
• solid		2x (0.5 2.5 mm²)
• finely stranded with core end processing		2x (0.5 1.5 mm²)
Type of connectable conductor cross-sections at	_	
AWG conductors		
• for main contacts		2/0 500 kcmil
• for auxiliary contacts		2x (20 14)
• for auxiliary contacts finely stranded with core		2x (20 16)
end processing		
Ambient conditions:		
Ambient temperature		
during operation	°C	60
during storage	°C	-25 +80
Derating temperature	°C	40
Protection class IP		IP00

Certificates/ approvals:

General Product Approval

EMC

Declaration of Conformity













Test Certificates

Shipping Approval

spezielle Prüfbescheinigunge n

Typprüfbescheinigu ng/Werkszeugnis









Shipping Approval

other





Umweltbestätigung

UL/CSA ratings:		
Yielded mechanical performance [hp] for three-phase		
AC motor		
● at 200/208 V		
— at inside-delta circuit at 50 °C rated value	hp	100
● at 220/230 V		
— at standard circuit at 50 °C rated value	hp	60
— at inside-delta circuit at 50 °C rated value	hp	125
● at 460/480 V		
 at standard circuit at 50 °C rated value 	hp	125
— at inside-delta circuit at 50 °C rated value	hp	250
Contact rating of auxiliary contacts according to UL		B300 / R300

Further information

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrymall


Cax online generator


 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RW44436BC34}\\$


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RW44436BC34

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW44436BC34&lang=en







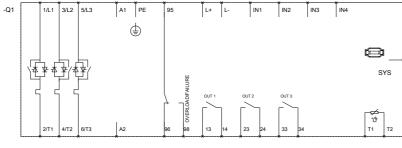

last modified: 29.02.2016