Catalog Numbers

Catalog No.	Amperage Rating Max	Max Interrupting Rating
1 PHASE, 3 WIRE, 120/240V AC MAX		
WEB1400B	400	65,000
WEB1400BU	400	100,000

Catalog No.	Amperage Rating Max	Max Interrupting Rating
3 PHASE, 4 WIRE, 240V AC MAX		
WEB3400B	400	65,000
WEB3400BU	400	100,000

- TYPE 3R OUTDOOR ENCLOSURE
- MAIN BUS RATING: 1200A MAX.
- FOR UNDERGROUND SERVICE ONLY
- COMPLIES WITH EUSERC DWG. NOs. 315, 343, and 347

Order Catalog Numbers below for units with Lug Kits factory installed.

CATALOG Number	BASE Number	with Lug Kit Factory Installed
WEB1400BA3	WEB1400B	LK12500N2
WEB1400BUA3	WEB1400BU	LK12500N2
WEB1400BA14	WEB1400B	LK11750N2
WEB1400BUA14	WEB1400BU	LK11750N2
WEB3400BB3	WEB3400B	LK32500N2
WEB3400BUB3	WEB3400BU	LK32500N2
WEB3400BB14	WEB3400B	LK31750N2
WEB3400BUB14	WEB3400BU	LK31750N2

Additional Modules, Accessories, and Lug Kits

FOR USE WITH: Module Description	Siemens Series#	Murray Series#
Main Breakers	(W)MC, WB, WEB	DB_W
Switches	WMP, WMS, WS, WES	DPT_W, DT_W
Tap/Terminal Boxes	WMTB, WTB, WET	DTB_W
Meter Module	WMM, WxMM, WMT, WML, WMK	DG_W, DC_W, DL_W
Extension Box	WMEX, WSP	DS
Bussed Elbow	(W)BE	DL

Connect Modules Using	Catalog Number / Torque
QuickConnect	QC1 (1ph) or QC4 (3ph) 400-440 lb-in (35-36 ft.-lb.)Torque
Single Bolt Joint	SBJ1 (1ph) or SBJ4 (3ph) 400-480 lb-in (35-40 ft.-lb.) Torque

1 Phase: Lugs for Phase and Neutral Connections (not supplied)					
NEMA Lug ①	MFG	Wire Range	Type	No. Wires per phase	Torque (lb.-in.)
LK11750N2	Siemens	300-750 kcmil	Mechanical	1	500
LK12500N2	Siemens	1/0-500 kcmil	Mechanical	2	500
2ACL-500	ILSCO	500 kcmil	Compression	2	NA ②
2ACL-750	ILSCO	750 kcmil	Compression	1	NA ②

3 Phase: Lugs for Phase and Neutral Connections (not supplied)					
NEMA Lug ①	MFG	Wire Range	Type	No. Wires per phase	Torque (lb.-in.)
LK31750N2	Siemens	300-750 kcmil	Mechanical	1	500
LK32500N2	Siemens	1/0-500 kcmil	Mechanical	2	500
2ACL-500	ILSCO	500 kcmil	Compression	2	NA ②
2ACL-750	ILSCO	750 kcmil	Compression	1	NA ②

① Order one mechanical lug kit for main breaker and neutral conversions. Contact lug manufacturer for compression lug quantities supplied for each kit.

② See lug manufacturer's instruction sheet supplied with the connector for tool, die, and number of crimps.

Schematics

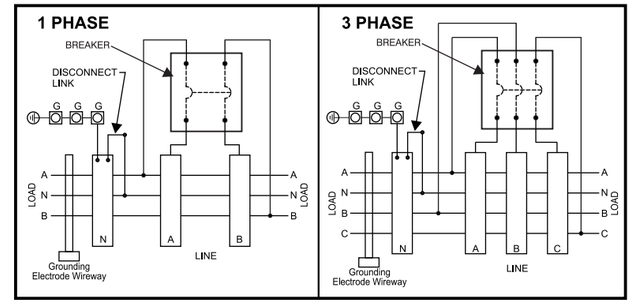

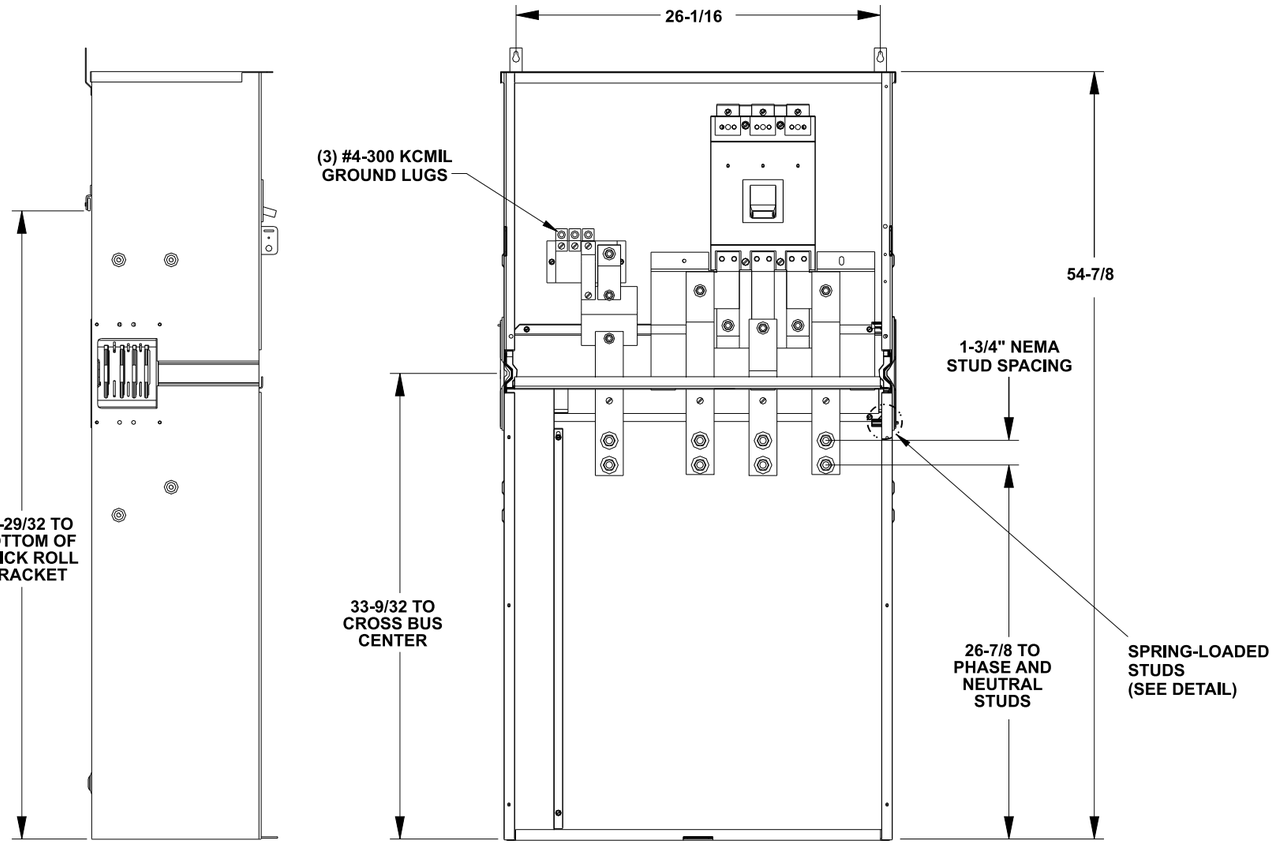

WEB3400B (3 Phase) SHOWN
VIEWS SHOWN WITHOUT COVER

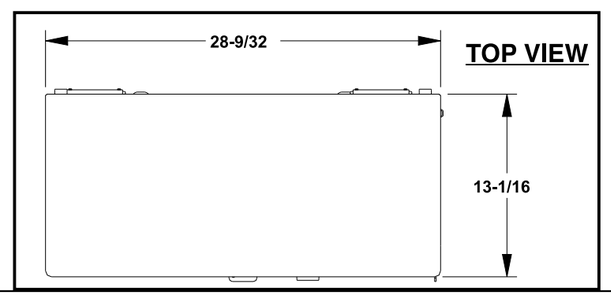

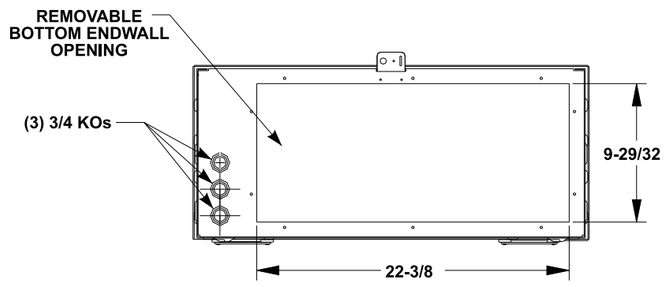



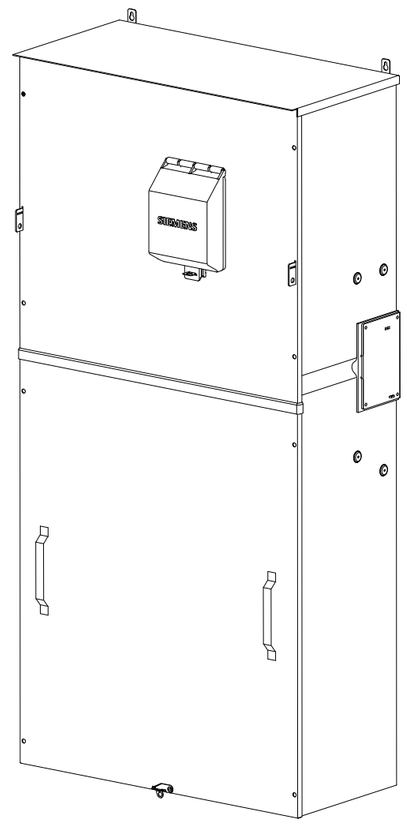

View Shown With Covers

© 2015 Copyright Siemens Industry, Inc.

SIEMENS
Siemens Industry, Inc.

PowerMod™ Breaker Mains

Description: WEB1400B thru WEB3400BU (EUSERC) Service Entrance Breaker Mains

KAM 10/23/15	Fam .	DO NOT SCALE DRAWING	Dwg. No. 400A_E_SE_Brkr_Mains