






Catalog Number: MPRV-100-MBLC-80
Item Description: 100A RT MTR DB PED
UPC Code: 784572319431

Brand Name: Milbank
Type: Ring Type Meter Socket
Application: Meter Socket With Main And Load Center
Standard: UL Listed
Voltage Rating: Up to 240 Volts Alternating Current
Amperage Rating: 100 Ampere Continuous
Phase: 1 Phase
Frequency Rating: 60 Hertz
Number Of Cutouts: 1
Cutout Size: 100 Ampere Main Breaker
Cable Entry: Underground
Terminal: Double Mechanical Line Side and Single Mechanical Load Side
Mounting: Pedestal
Enclosure: Type 3R, G90 Galvanized Steel with Powder Coat Finish


Additional Specifications: Number of Jaws:4 Terminal
Hub Opening and Closing Plates:Plain Top
Equipment Ground:Ground Bar
Bypass Provision:No Bypass
Number Positions:1 Position



Utility requirements may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must always be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.

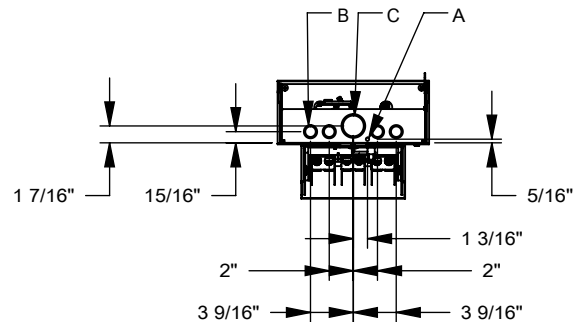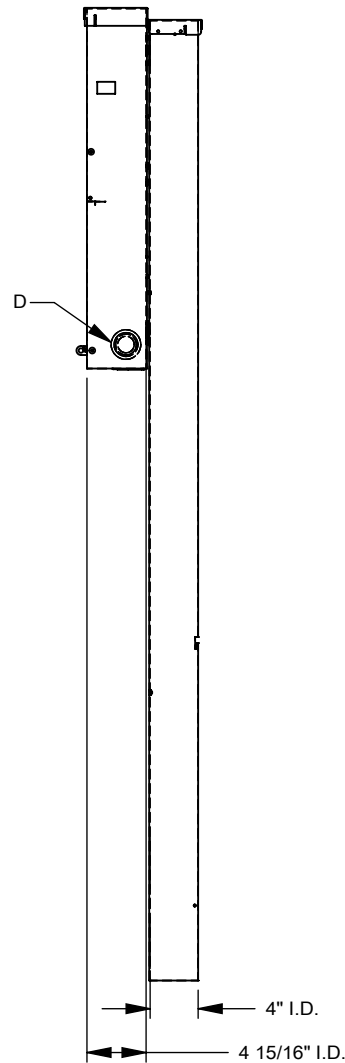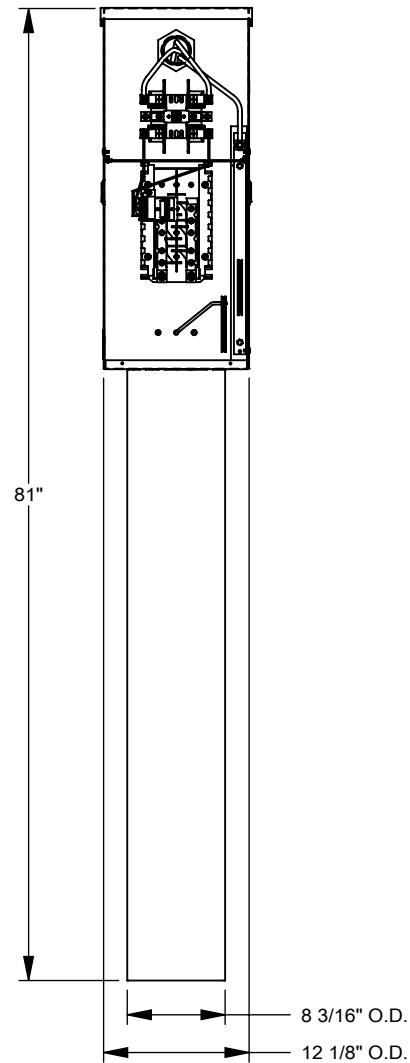

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	1	¼ SOLID K.O.
B	4	½, ¾ CONC. K.O.
C	1	1¼, 1½ CONC. K.O.
D	2	1, 1¼, 1½, 2 CONC. K.O.

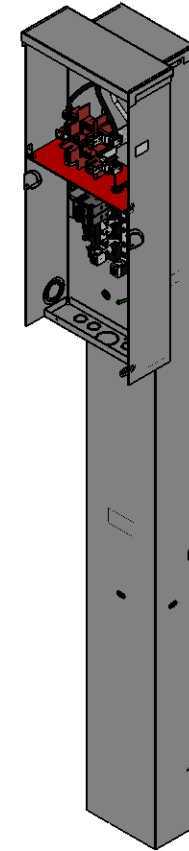

MILBANK
ENERGY AT WORK

Version:

1

All dimensions are +/- 1/16".
Drawing views are not to scale.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.