

INSULATED WIRE STRIPPER/CUTTER

8-16 Stranded AWG



 1000 V

**KLEIN
TOOLS®**

Insulated Wire Stripper/Cutter

KLEIN TOOLS

For Professionals... Since 1857®

Precision 8-16 Stranded AWG Stripping and Cutting

Klein's new insulated Wire Stripper/Cutter easily strips and cuts 8-16 stranded AWG and has two layers of protection against shock from energized sources with voltage up to 1000 volts. Klein insulated tools meet or exceed the ASTM F1505-01, IEC 60900:2004 and NFPA-70E, 2004 ed. standards, for insulated tools, and are clearly marked with the official 1000-volt rating symbol.

Features

Hardened steel with precision ground stripping holes for easy removal of insulation.

Flame-retardant, impact-resistant, bright orange outer coating.

Strips 8-16 AWG stranded wire (6.0 mm² - 1.0 mm²).

Shear-type cutting blades for clean cuts.

Spring-loaded action for self-opening.

Thick, exceptionally tough, high-dielectric white inner coating is bonded to the tool.



1000 V


Black-oxide finish resists corrosion.

Tool meets or exceeds ASTM F1505-01, IEC 60900:2004 and NFPA-70E, 2004 ed. standards.


Integral guards help prevent hand contact with conductive parts.

Do NOT use to cut steel wire or bolts.


11049-INS

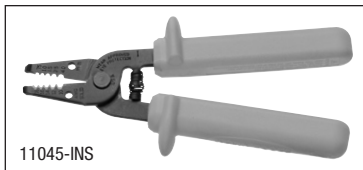

11049-INS

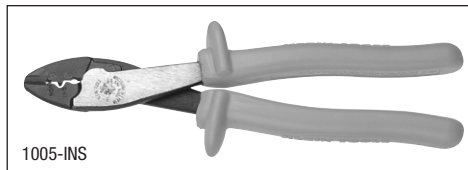

1005-INS

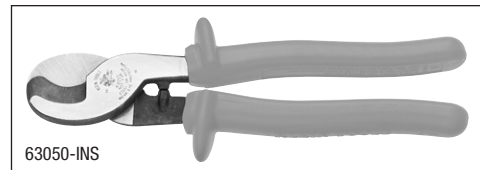

63050-INS

Ordering Information

	Cat. No.	UPC No. 0-92644+	Description	Strips and Cuts	Overall Length	Weight (lbs.)
NEW!	11049-INS	74067-1	Insulated Wire Stripper/Cutter	8 – 16 AWG stranded (6.0 – 1.0 mm ²)	7" (178 mm)	.70
	11045-INS	74049-7	Insulated Wire Stripper/Cutter	10 – 18 AWG solid (4.0 – .75 mm ²)	7" (178 mm)	.70
	1005-INS	74205-7	Insulated Crimping/Cutting Tool	10 – 22 AWG	10" (254 mm)	1.05
	63050-INS	63051-4	Insulated High-Leverage Cable Cutter	4/0 aluminum, 2/0 soft copper	9-1/2" (241 mm)	1.04

▲WARNING: Whenever possible, always de-energize lines and equipment prior to working on or around them. Klein insulated tools are designed only to reduce the chance of injury where the tool may make contact with an energized source.

▲WARNING: Wear approved eye protection. Always inspect your tools before use. Do not use if orange coating cracks, breaks or becomes damaged. Destroy tool if white layer shows through orange layer.

▲WARNING: Only use tools that are marked with the official international 1000-volt rating symbol shown below, if there is any chance that the tools will make contact with an energized source.

▲WARNING: Do NOT touch uninsulated portion of the tool or any conductive object when either might contact an energized source.

▲WARNING: Because moisture, films, or other surface contaminants are conductive, Klein insulated tools must be kept clean, dry, and free of any surface contaminants.

