


880W Series[™] Floor Boxes for Wood Floors

Rectangular Floor Boxes for Wood Floors



Wiremold[®] 880W Series[™] Wood Floor Boxes provides an excellent solution for unique wood floor applications when power and communication services are required in remote locations, as in a large, open space area. This wood floor box series is available in a rectangular design in one-, two, or three-gang configurations and can be used in any wood frame construction.

880W Series Wood Floor Boxes have many different applications. Some of those include upscale housing, home offices, board rooms, and gymnasiums.

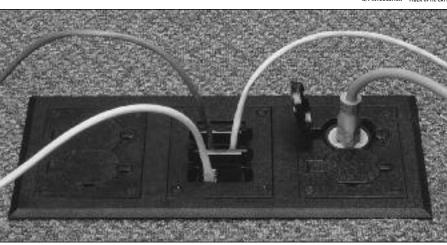

Three-Gang 880W Series Floor Box shown with a nonmetallic cover for a multiservice application.

FEATURES & BENEFITS


- **TopGuard protection.** An integral design which keeps out water, dirt, and debris from the power or communication compartments. Whenever you see the TopGuard protection icon applied to any Wiremold product, you will know that he product meets and exceeds the new UL scrub water exclusion requirement.
- New brushed aluminum covers for power applications. 830CK Series Aluminum Covers have been redesigned to now accept threaded conduit when passing through power cables.
- New brass and brushed aluminum covers to accept single locking power receptacles. New 828DLR Series provides single flip lid cover.
- New 828COMTC Series Cover Kit in brass and brushed aluminum. Allows communication devices to be recessed into 880W Series Boxes.
- Available in one-, two-, and three-gang configurations. Multiservice separation and even greater capacity when divider is removed. Eliminates cost of using multiple floor boxes for high capacity requirements.
- Triple service capacity. Accommodates power, communication and/or audio/video devices. Eliminates the need for multiple boxes

- BAA Aluminum Covers. Rectangular aluminum covers are now available in a version that complies with the Buy America Act and ARRA requirements. Covers are available in five powder coat finishes (black, gray, bronze, brass and nickel.
- Flush activation assembly. Same activation assemblies as Walker concrete floor boxes. Wide range of aesthetically pleasing brass and nonmetallic activations that do not obstruct the floor area or create a safety hazard.
- Datacom connectivity options. Accepts industry standard and proprietary devices from a wide range of manufacturers to provide a seamless and aesthetically pleasing interface for voice, data, audio, and video applications at the point-ofuse. A wide selection of data and adapter options available for use with Ortronics® TracJack[™] and Series II devices.
- Boxes and covers have been listed by Underwriters Laboratories Inc. to their standard UL514A, 514C, 514D, and Canadian standard C22.2.




Protection from water, dirt, and debris.

880W Series Floor Boxes Ordering Information

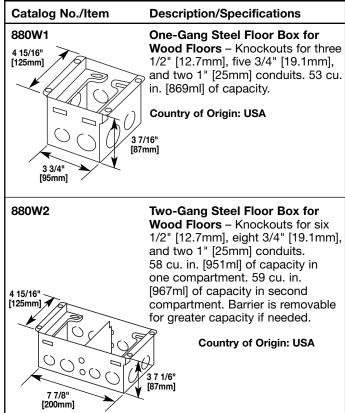


000111 C



alog No./Item	Description/Specifications	Catalog No./Item	Description/Specificati
DW1817B	One-Gang Steel Floor Box for Wood Floors – 880W1 Floor Box with 817B brass flange included. Flange can be used for tile or carpet applications.	880W2827B	Two-Gang Steel Floor I for Wood Floors – 880V Floor Box with 827B brass flange included. Flange can be used for t or carpet applications.
3 3/4	3 7/16" [87mm] NOTE: Order cover separately.	7 7/8" [200mm]	Country of Origin: USA 3 7 1/6" [87mm] NOTE: Order cover separ
[95mm] 380W1818TCAL 4 15/16" 125mm]	One-Gang Steel Floor Box for Wood Floors – 880W1 Floor Box with 818TCAL brushed aluminum flange included. Flange can be used for tile or carpet applications.	880W2828TCAL	Two-Gang Steel Floor E for Wood Floors – 880W Floor Box with 828TCAL brushed aluminum flange included. Flange can be used for tile or carpet applications.
	^{3 7/16"} Country of Origin: USA ^[87mm] NOTE: Order cover separately.	7 7/8" [200mm]	3 7 1/6" Country of Origin: USA [87mm] NOTE: Order cover separ

2

880W Series Floor Box Kits Ordering Information (continued) Catalog No./Item **Description/Specifications** Catalog No./Item **Description/Specifications** 880W3837B **Three-Gang Steel Floor Box** 880W3838TCAL **One-Gang Steel Floor Box** for Wood Floors - 880W3 for Wood Floors - 880W3 Floor Box with 837B brass Floor Box with 838TCAL flange included. Flange brushed aluminum flange 4 15/16" [125mm] can be used for tile or included. Flange 15/16" [125mm] can be used for tile or carpet applications. carpet applications. Country of Origin: USA **Country of Origin: USA** 3 7 1/6" 3 7 1/6 [87mm] [87mm] 0 NOTE: Order cover separately. NOTE: Order cover separately. 12' 12" [305mm] [305mm]

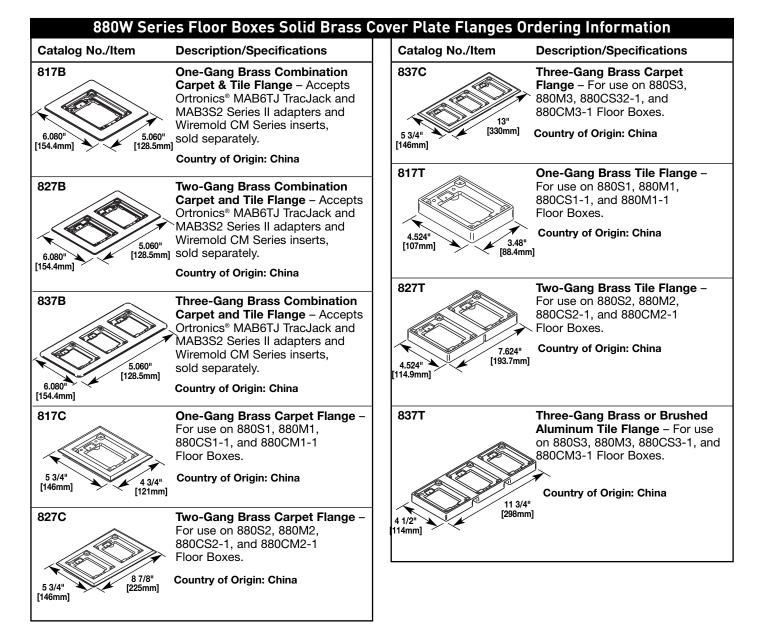


NOTE: Brass covers and flanges are not interchangeable with aluminum or nonmetallic covers and flanges. Nonmetallic covers are interchangeable with aluminum flanges.



880	W Series Floor Boxes Metal	Cov	ver Plates Ordering	Information
Catalog No./Item	Description/Specifications		Catalog No./Item	Description/Specifications
828R 3.156" [80.2mm]	Brass Duplex Cover Plate – Flip lids. Can also be used with a 106 type communication adapter. Country of Origin: China		829STC 3 1/8" [79mm] 4 1/8" [105mm] 829CK	Brass Communication Cover Plate – Data slides. Feed through only, not for use with a mounting plate for communication jacks. Country of Origin: China Brass Communication Cover
828GFITC 3.156" [80.2mm] 4.182" [106.2mm]	Brass GFI Cover Plate – May be used with Activate and Ortronics® Connectivity Systems in conjunction with 817B, 827B, and 837B Flanges.	_	3.156" [80.2mm] 829CK-1	Plate – 2 5/8" and 2 1/4" [67mm and 57mm] plugs. Country of Origin: China Brass Communication Cover
828DPGFITC	Brass Rectangular Cover Plate – Allows for mounting of a duplex style receptacle with a rectangular style flip lid cover. Country of Origin: China		3.156" [80.2mm]	
3.156" [80.2mm] [106.2mm]			829CK-3/4	Brass Communication Cover Plate – 2 5/8" and 3/4" [67mm and 19.1mm] plugs. Country of Origin: China
828DLR	Brass Single Locking Receptacle Cover Plate – Single flip lid cover for 20A or 30A single locking receptacles. Device opening is 2 5/8" [67mm]. For use with maximum female locking device of 1.58" diameter, and maximum male plug face of 2.25" diameter Country of Origin: China		3.156" 4.182" [80.2mm] 829CK-1/2 3.156" 4.182" [106.2mm] 4.182" [106.2mm]	 Brass Communication Cover Plate – 2 5/8" and 1/2" [67mm and 12.7mm] plugs. Country of Origin: China
828SP1C 3 1/8" [79mm] [105mm]	Brass Duplex Cover Plate – Screw plugs. Screw plugs are 1 1/2" [38mm] in diameter. Country of Origin: China		828MAAP	A/V Adapter Plate – Sheet metal adapter plate that accepts two (2) Extron® Electronics MAAP style device plates (sold separately). For use with 828GFITC or 828GFITCAL cover plates. (Sold separately) Country of Origin: USA




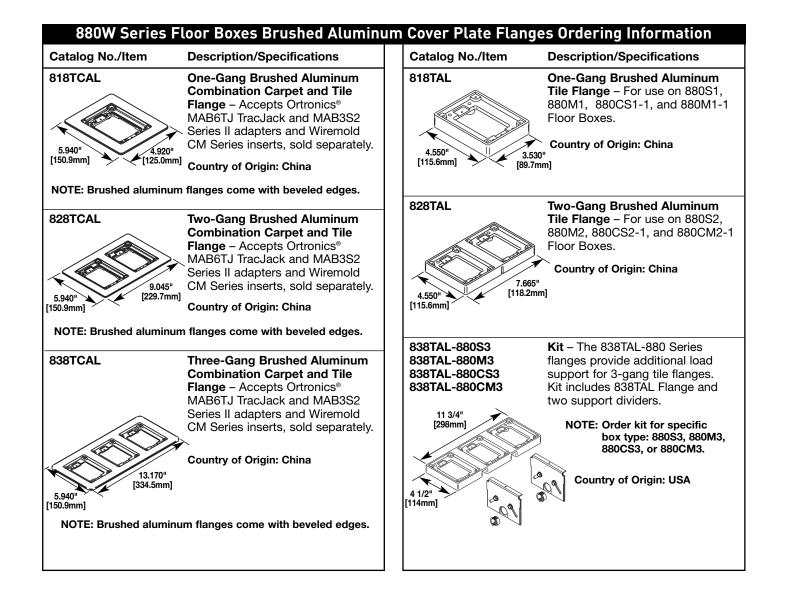



Catalog No /Harr	Departmention/Spacifications	Cotolog No /ltom	Departmention/Specifications
Catalog No./Item 328R-TCAL	Description/Specifications Brushed Aluminum Duplex	Catalog No./Item 830CKTCAL	Description/Specifications Brushed Aluminum Cover
	Cover Plate – Flip lids. Can also be used with a 106		Plate – Power or communica plate with 2" [51mm] and 1 1
	type communication adapter.		[32mm] plugs. Country of Origin: China
3.290" [83.6] 4.310" [109.5]	Country of Origin: China	3.290" [83.6mm] 4.310" [109.5m	NOTE: Acceptable for use with
28GFITCAL	Brushed Aluminum GFI Cover Plate – May be used with Activate and Ortronics® Connectivity Systems in	830CKTCAL-1	Brushed Aluminum Cover Plate – Power or communica plate with 2" [51mm] and 1" [25mm] plugs.
	conjunction with 817B, 827B, and 837B Flanges.	3.290" [83.6mm] 4.310"	Country of Origin: China NOTE: Acceptable for use with
3.290" 4.310" [83.6] [109.5]	Country of Origin: China	[83.6mm] >> < 4.310" [109.5mi	
		830CKTCAL-3/4	Brushed Aluminum Cover Plate – Power or communica
828DPGFITCAL	Brushed Aluminum Rectangular Cover Plate – Allows for mounting of a duplex style receptacle with a		plate with 2" [51mm] and 3/4 [19.1mm] plugs.
	rectangular style flip lid cover.		Country of Origin: China
	Country of Origin: China	3.290" [83.6mm] 4.310" [109.5mm]	NOTE: Acceptable for use with threaded conduit when through power cables.
3.290" 4.310" [83.6] [109.5]		830CKTCAL-1/2	Brushed Aluminum Cover Plate – Power or communica
828DLRAL	Brushed Aluminum Single		plate with 2" [51mm] and 1/2 [12.7mm] plugs.
	Locking Receptacle Cover Plate – Single flip lid cover for 20A or 30A		Country of Origin: China
O	single locking receptacles. Device opening is 2 5/8" [67mm]. For use with maximum female locking	3.290" [83.6mm] 4.310" [109.5mn	NOTE: Acceptable for use with threaded conduit when p through power cables.
	device of 1.58" diameter, and maximum male plug face of 2.25" diameter	828MAAP	A/V Adapter Plate – Sheet n adapter plate that accepts tw
¥	Country of Origin: China		Extron [®] Electronics MAAP structure device plates (sold separately
			use with 828GFITC or 828GF cover plates. (Sold separately
			Country of Origin: USA



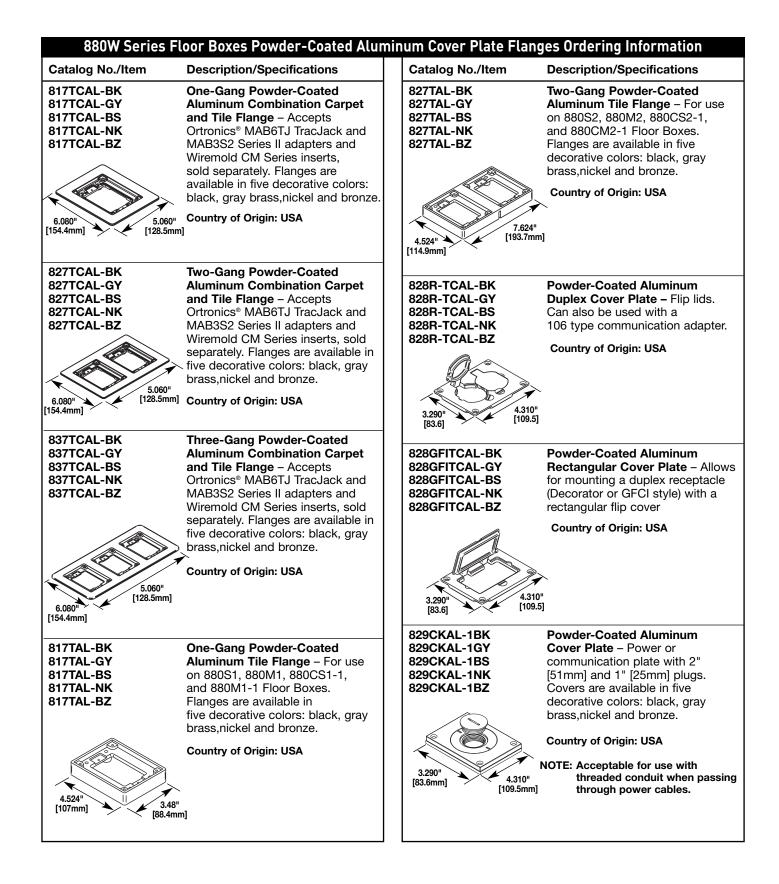




OmniBox Series Floo	r Boxes Powder-Coated Alumi	nu	m Cover Plate Flange	s Ordering Information (Continued)
Catalog No./Item	Description/Specifications		Catalog No./Item	Description/Specifications
829CKAL-3/4GY 829CKAL-3/4BS 829CKAL-3/4NK 829CKAL-3/4BZ	Powder-Coated Aluminum Cover Plate – Power or communication plate with 2" [51mm] and 3/4" [19.1mm] plugs. Covers are available in five decorative colors: black, gray brass,nickel and bronze. Country of Origin: USA		828MAAP	A/V Adapter Plate – Sheet metal adapter plate that accepts two (2) Extron® Electronics MAAP style device plates (sold separately). For use with 828GFITC or 828GFITCAL cover plates. (Sold separately) Country of Origin: USA

Catalog No./Item	Description/Specifications	Catalog No./Item	Description/Specifications
817PCC-BLK 817PCC-BRN		837PCC-BLK 837PCC-BRN 5 3/4" [146mm]	Three-Gang Nonmetallic Flange – Available in black or brown. For Ortronics® connectivity use with 829PFLRT Cover. For Activate connectivity use with 829PFL Cover. Accepts Ortronics® MAB6TJ TracJack and MAB3S2 Series II adapters and Wiremold CM Series inserts, sold separately. Country of Origin: Mexico
827PCC-BLK 827PCC-BRN 5 3/4" [146mm] 8 7/8" [225mm]	Two-Gang Nonmetallic Carpet Flange – Available in black or brown. For Ortronics connectivity use with 829PFLRT Cover. For Activate connectivity use with 829PFL Cover. Accepts Ortronics® MAB6TJ TracJack and MAB3S2 Series II adapters and Wiremold CM Series inserts, sold separately. Country of Origin: Mexico	Brass covers and aluminum or non	terrazzo, and carpet floors. flanges are not interchangeable with metallic covers and flanges. Nonmetallic hangeable with aluminum flanges.



880W S	eries Floor Boxes Nonmeta	llic	: Cover Plates Orde	ring Information
Catalog No./Item	Description/Specifications		Catalog No./Item	Description/Specifications
828PR-BLK 828PR-BRN 3 3/16" [81mm] 4 1/8" [105mm]	Nonmetallic Duplex Cover Plate – Flip lids. Available in black or brown. Can also be used with a 106 type communication adapter. Country of Origin: USA		829PFLRT-BLK 829PFLRT-BRN 3 3/16" [81mm] 4 1/8" [105mm]	Nonmetallic Communication Cover Plate – Individual flip lids.* Available in black or brown. Gasket included. Ortronics® MAB6TJ TracJack and MAB3S2 Series II adapters included. Country of Origin: USA
828PRGFI-BLK 828PRGFI-BRN 3 3/16" [81mm]	Nonmetallic GFI Cover Plate – Available in black or brown. May be used with Ortronics® Connectivity systems in conjunction with 817, 827 and 837PCC Series flanges. Country of Origin: USA		829PCK-BLK 829PCK-BRN 3 3/16" [81mm]	Nonmetallic Communication Cover Plate – Breakouts. Available in black or brown. Feed through only, not for use with a mounting plate for communication jacks. Country of Origin: USA
829PFL-BLK 829PFL-BRN 3 3/16" [81mm] 4 1/8" [105mm]	Nonmetallic Communication Cover Plate – Individual flip lids.* Available in black or brown. Gasket included. Wiremold CM Series inserts included. Country of Origin: USA		829PSTC-BLK 829PSTC-BRN 3 3/16" [81mm]	Nonmetallic Communication Cover Plate – Data slides. Available in black or brown. Feed through only, not for use with a mounting plate for communication jacks. Country of Origin: USA



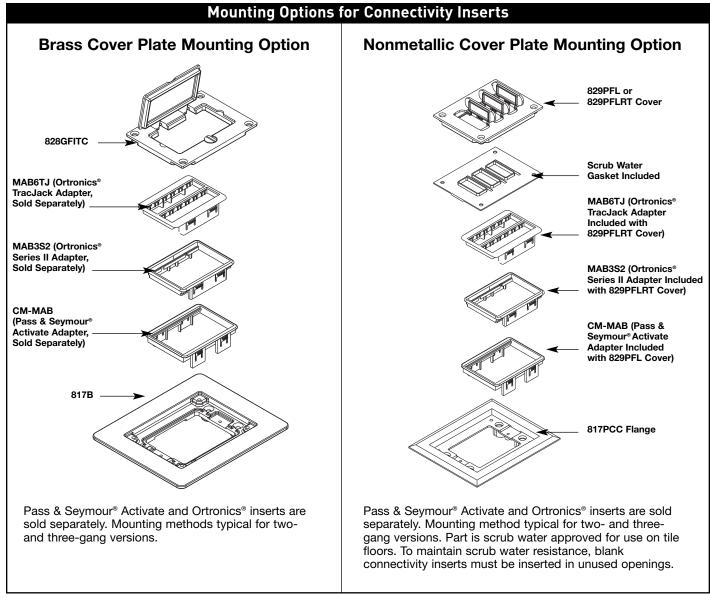

NOTE: The 828GFITC Cover must remain open on some inserts.

NOTE: 829PFL Cover must remain open on some Activate connectivity inserts.

NOTES

NOTES

60 Woodlawn Street West Hartford, CT 06110 Phone: 1.877.BY.LEGRAND (295-3472) Fax: 1.860.232.2062 www.legrand.us/wiremold

570 Applewood Crescent Vaughan, Ontario L4K 4B4 Phone:905.738.9195 Fax: 905.738.9721