



Standard

STANDARD H1Q26TPWI

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

Product data


General Information		Rated Lamp Power	26W W
Lamp Type	CFQ26W/G24D	Wiring	
Number Of Lamps	1 piece/unit	Wire Striplength	0.50/0.375 mm
Lamp Footage	-	Lamp Connection	Series
Ballast Type	Magnetic Fluorescent	Wire Length By Color	See data sheet
Base Model	H1Q26TPW	Wire Gauge (Nom)	18AWG mm
Suitable For Outdoor Use	Yes	Wire Type	Solid
Automatic Restart	Yes	Remote Wiring Configuration Allowed	Yes
Operating and Electrical		Tandem Wiring Configuration Allowed	No
Input Voltage	120 V	Through Wiring Configuration Allowed	No
Input Frequency	60 Hz	Max Ballast-Lamp Distance Remote Wiring	30'
Total Harmonic Distortion USA	25 %	Max Ballast-Lamp Distance Tandem Wiring	-
Power (Rated) (Nom)	26 W	Max Ballast-Lamp Distance Through Wiring	-
Ignition Method	Preheat	Mechanical and Housing	
Crestfactor (Nom)	1.5	Housing Material	Metal
Ignition Time (Nom)	1 s	Housing	T1
Input Current (Open Circuit)	0.41	Housing Dimensions	6.5" x 2.38" x 1.5"
Input Current (Starting)	0.33	Approval and Application	
Ballast Factor (Nom)	0.83	EMC Immunity Standard	FCC Non-Consumer
Power Factor (Nom)	0.98	Hum And Noise Level	A
Input Current (Nom)	0.24 A		
Input Power (Nom)	28 W		

Standard

UL Recognized	No
Product Data	
Order product name	STANDARD H1Q26TPWI
EAN/UPC - Product	781087068298
Order code	913700506819

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	913700506819
Net Weight (Piece)	1.094 kg

Dimensional drawing

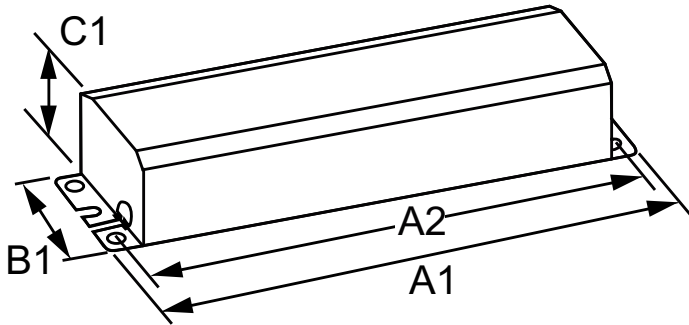

Product	A1	A2	B1	C1
STANDARD H1Q26TPWI	6.5 in	6 in	2.38 in	1.5 in

MAG BALLAST (1) 26W COMPACT(2-PIN) 120V

