



# Standard

## STANDARD MAG BALLAST (2) 26W COMPACT(2-PIN) 277V

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

### Product data

General Information	
Lamp Type	CFQ26W/G24D
Number of Lamps	2 piece/unit
Lamp Footage	-
Ballast Type	Magnetic Fluorescent
Base Model	VH2Q26TPBLS
Suitable For Outdoor Use	Yes
Automatic Restart	Yes
Operating and Electrical	
Input Voltage	277 V
Input Frequency	60 Hz
Max THD	25 %
Starting Method	Preheat
Lamp Current Crest Factor (Nom)	1.5
Ignition Time (Nom)	1 s
Inp. Current (Open Circuit)	0
Input Current (Starting)	0.32
Ballast Factor (Nom)	0.87
Power Factor (Nom)	0.98
Input Current (Operating) (Nom)	0.2 A

Input Power (Nom)	55 W
Rated Lamp Watts	26 W
Wiring	
Wire Striplength	0.50/0.375 mm
Lamp Connection	Series
Wire Length By Color	See data sheet
Wire Gauge (Nom)	18AWG mm
Wire Type	Solid
Remote Wiring Configuration Allowed	Yes
Tandem Wiring Configuration Allowed	Yes
Through Wiring Configuration Allowed	Yes
Max Ballast-Lamp Distance Remote Wiring	30'
Max Ballast-Lamp Distance Tandem Wiring	Any = 30'
Max Ballast-Lamp Distance Through Wiring	Any = 30'
Mechanical and Housing	
Housing Material	Metall
Housing	R5
Housing Dimensions	9.5" x 2.38" x 1.69"

## Standard

### Approval and Application


EMC Immunity Standard	FCC Non-Consumer
Approbation Marks	CSA certificate UL certificate RoHS Compliant
Sound Rating	A
UL Recognized	No

### Product Data

Order product name	STANDARD VH2Q26TPBLSM
--------------------	-----------------------

EAN/UPC - Product	781087008829
Order code	VH2Q26TPBLSM
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	913710339202
Net Weight (Piece)	1.484 kg

### Dimensional drawing

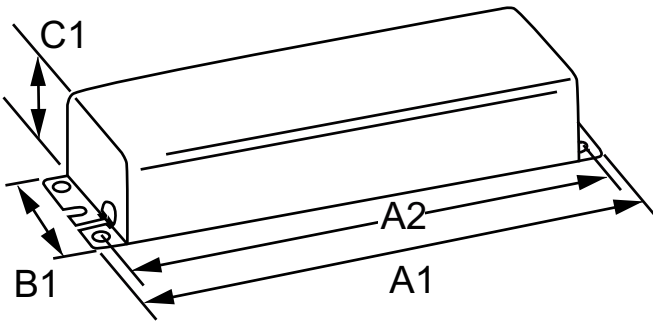

MAG BALLAST (2) 26W COMPACT(2-PIN) 277V

Product	A1	A2	B1	C1
STANDARD VH2Q26TPBLSM	9.5 in	8.91 in	2.38 in	1.69 in

