
Catalog Number:	U5136-O-200S-10GR
Item Description:	200A RL MTR DB PED
UPC Code:	784572312470

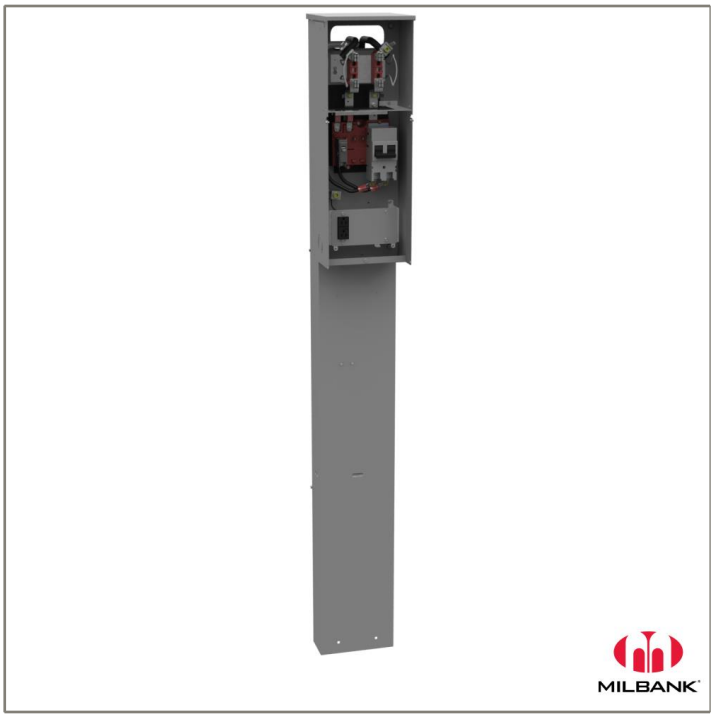

Brand Name:	Milbank
Type:	Ringless Metered Power Supply Unit
Special Features:	4 Terminal, Plain Top, Ground Bar, Horn Bypass, Single Power Head, 4 Branch Circuits,
Application:	Mobile Home Power
Standard:	UL Listed
Voltage Rating:	Up to 240 Volts Alternating Current
Amperage Rating:	200 Ampere Continuous
Wattage:	Not Applicable
Frequency Rating:	60 Hertz
Phase:	1 Phase
Number of Receptacles:	1
Receptacle Configuration:	NEMA 5-20 Ground Fault Receptacle
Control:	One 200 Ampere Main Breaker, One Single Pole 20 Ampere Breaker
Material:	G90 Galvanized Steel with Powder Coat Finish
Mounting:	Pedestal Mount
Cable Size:	6 AWG to 350 KCMIL
Enclosure:	Type 3R


Additional Specifications:


Number of Main Breakers:1


Main Breaker Size:200 Ampere Main Breaker


Utility requirements may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must always be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.

FEATURE TABLE		
ITEM	QTY	DESCRIPTION
A	4	STD. MNTG. EMBOSS
B	2	¼ SOLID K.O.
C	2	½, ¾ CONC. K.O.
D	3	1, 1¼, 1½, 2 CONC. K.O.
E	1	WESTERN LIGHT OPENING

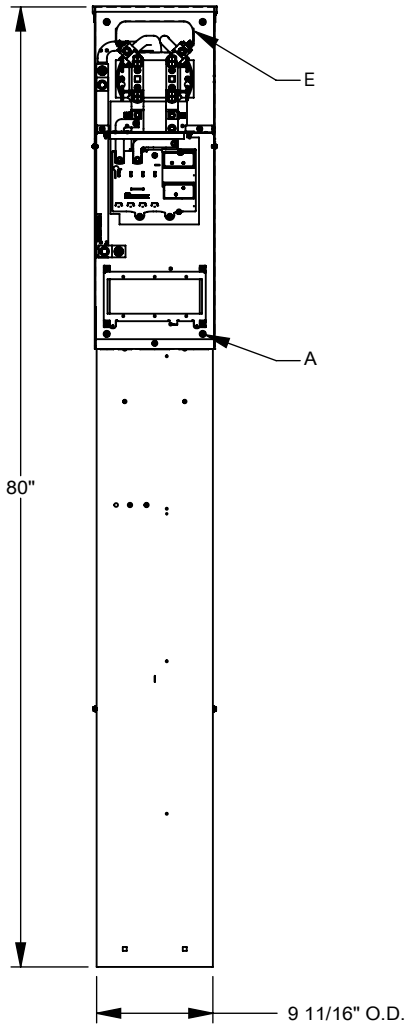

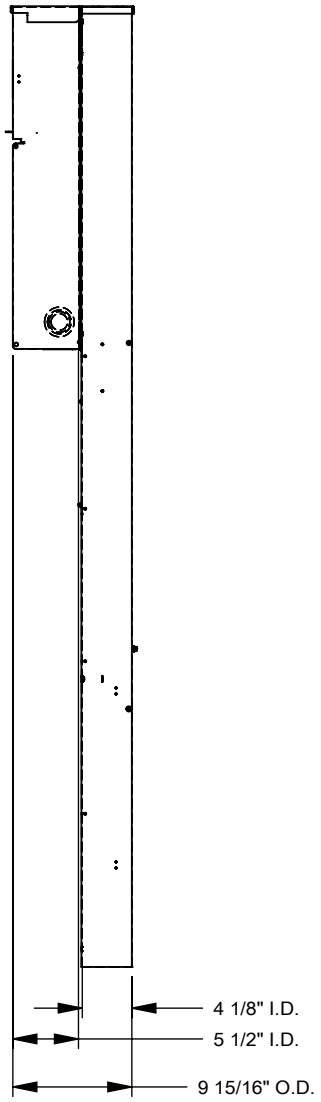

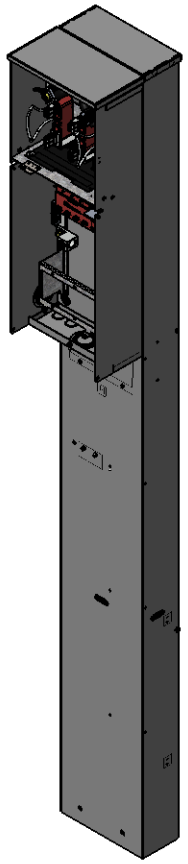

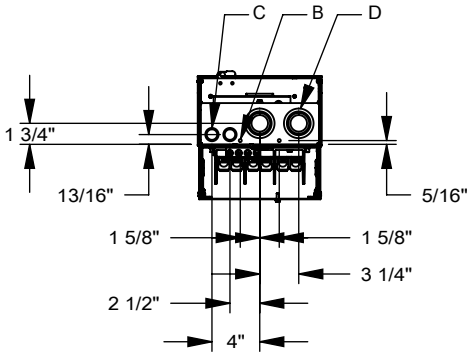

MILBANK
ENERGY AT WORK

Version:

1

All dimensions are +/- 1/16".
Drawing views are not to scale.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.