


**GENERAL INFORMATION:**

Catalog number: See table below  
 Description: 6/2 & 8/1 SRDT, 125/250V 50A range power supply cord kit with flanged spade terminals and metal strain relief  
 Approvals: UL Listed

**CONSTRUCTION PARAMETERS:**

Cable type: SRDT, flat, gray  
 Insulation and jacket material: PVC, integral insulation and jacket  
 Conductors: (2) 6 AWG & (1) 8 AWG, bare copper  
 Conductor identification: Center conductor (8 AWG neutral) is ribbed  
 Overall cable dimensions (nom): 1.025 x 0.400"  
 Temperature rating: -20 to +60 deg C

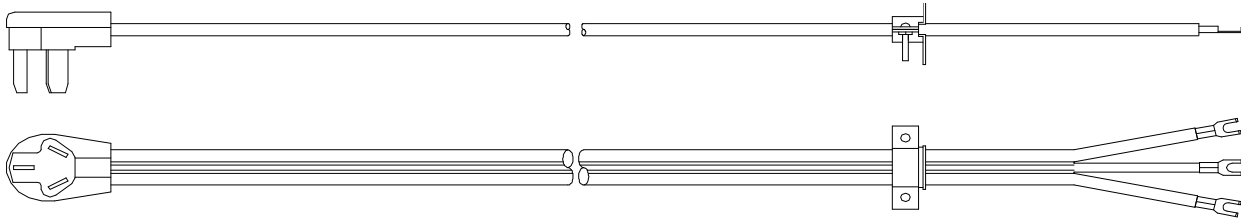

*Note: Plug style may vary*

Plug configuration: NEMA 10-50P  
 Plug electrical ratings: 125/250 VAC, 50A  
 Plug material: PVC, gray  
 Terminals: 1/4" flanged spade  
 Strain relief: Metal, included but not attached

**CATALOG NUMBERS:**

Catalog number	Length	Case qty	UPC
90148809	4 ft	6	0 29892 09014 2
90158809	5 ft	6	0 29892 09015 9
90168809	6 ft	6	0 29892 09016 6

*This product complies with European Directive 2011/65/EU (RoHS-2,*

The information presented here is, to the best of our knowledge, true and accurate. However, since conditions of use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part.

We disclaim all liability in connection with the use of information contained herein or otherwise.

This specification is the proprietary intellectual property of Southwire Company LLC. Any information contained herein shall not be disclosed to any party without the written consent of Southwire Company LLC.