




Metallics

An **AMERICAN** Source For Premier
and Innovative Fasteners and Anchors

SPLIT LOCK WASHERS – SILICON BRONZE

The following Specification Sheet applies to all **Split Lock Washers – Silicon Bronze** in our **JBLW** series.

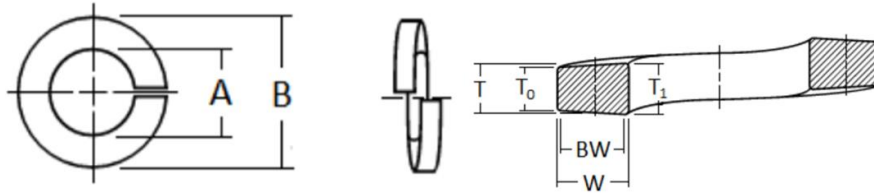

Nominal Washer Size	A		B	T	W	BW
	Inside Diameter		Outside Diameter	Mean Section Thickness $(t_1+t_0)/2$	Section Width	Bearing Width
	Max.	Min.	Max.	Min.	Min.	Min.
#6	.148	.141	.250	.031	.047	.033
#8	.174	.167	.293	.040	.055	.038
#10	.200	.193	.334	.047	.062	.043
1/4	.260	.252	.487	.062	.109	.076
5/16	.322	.314	.583	.078	.125	.087
3/8	.385	.377	.680	.094	.141	.099
1/2	.512	.502	.869	.125	.171	.120
5/8	.641	.628	1.073	.156	.203	.142
3/4	.766	.753	1.265	.188	.234	.164
7/8	.894	.878	1.459	.219	.266	.186

Metallics

229 Cross Street
Bristol, CT 06010

www.metallics.us

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358



Metallics

An *AMERICAN* Source For Premier
and Innovative Fasteners and Anchors

Specification Requirements:

- Dimensions: ASME B18.21.1
- Material & Mechanical Properties: Silicon Bronze per ASME B18.21.1
- Twist Test: 45° per ASME B18.21.1

Metallics

229 Cross Street
Bristol, CT 06010

www.metallics.us

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358