
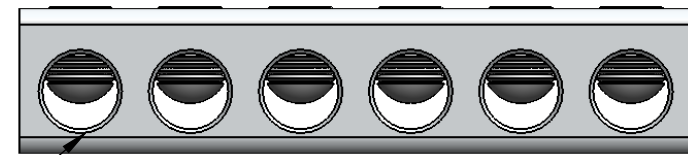


PL500-6 SHOWN

PART NUMBER	NO. OF PORTS	LENGTH
PL500-2	2	2.56
PL500-3	3	3.71
PL500-4	4	4.86
PL500-5	5	6.00
PL500-6	6	7.145
PL500-8	8	9.44
PL500-10	10	11.73
PL500-12	12	14.02
PL500-14	14	16.31



WIRE ENTRY PORT
WIRE RANGE: 500KCMIL - #4 AWG
PRE-FILLED W/ OXIDE INHIBITOR

CONTACT NSi FOR SALES @ 800.321.5847

NOTES:

- CONNECTOR MANUFACTURED FROM 6061-T6 ALUMINUM ALLOY.
- CONNECTOR CHROMATED FOR INCREASED CORROSION RESISTANCE.
- UL LISTED PER UL486A/B SPECIFICATIONS FOR 600V.
- DUAL RATED FOR 90°C COPPER AND/OR ALUMINUM CONDUCTOR.

		POLARIS SALES CO. INC	
<small>PROPRIETARY AND CONFIDENTIAL</small>		<small>11625 PROSPEROUS DRIVE ODESSA, FL 33556</small>	
<small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLARIS SALES CO. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLARIS SALES CO. INC. IS PROHIBITED.</small>		TITLE: UNINSULATED 500 CONNECTOR	
<small>NAME</small>		<small>DWG. NO.</small>	
<small>DRAWN BY</small> S.PARRY		PL500-	
<small>DATE</small> 07/2012		<small>SCALE:</small> N/A	
<small>MATERIAL:</small> N/A		<small>SHEET:</small> 1 OF 1	