




Atlanta, Georgia

Phone 800-521-7326

Fax 770-745-1333

Flat Washer USS Grade 8 Yellow Zinc

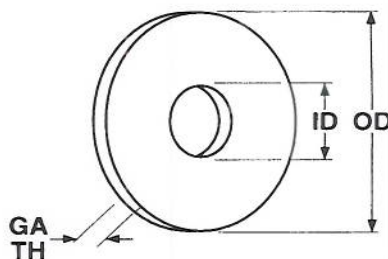

Peco Catalog#	Bolt Size	Inside Diameter			Outside Diameter			Thickness		Approximate Quantity in 50 Lbs.
		Nominal	Min	Max	Nominal	Min	Max	Min	Max	
Please see section five in our catalog.	1/4	5/16	0.307	0.327	3/4	.727	0.749	0.055	0.072	7500
	5/16	3/8	0.370	0.390	7/8	.868	0.905	0.064	0.080	5000
	3/8	7/16	0.433	0.453	1	0.993	1.030	0.064	0.080	3500
	7/16	1/2	0.495	0.515	1-1/4	1.243	1.280	0.064	0.080	2500
	1/2	9/16	0.557	0.577	1-3/8	1.368	1.405	0.097	0.121	1500
	9/16	5/8	0.620	0.640	1-1/2	1.462	1.499	0.097	0.121	1100
	5/8	11/16	0.681	0.718	1-3/4	1.743	1.780	0.122	0.146	700
	3/4	13/16	0.805	0.842	2	1.993	2.030	0.122	0.146	500
	7/8	15/16	0.931	0.968	2-1/4	2.243	2.280	0.136	0.160	350
	1	1-1/16	1.055	1.092	2-1/2	2.493	2.530	0.136	0.160	300
	1-1/8	1-1/4	1.243	1.280	2-3/4	2.743	2.780	0.136	0.160	250
	1-1/4	1-3/8	1.368	1.405	3	2.993	3.030	0.136	0.160	200
	1-1/2	1-5/8	1.615	1.670	3-1/2	3.490	3.545	0.136	0.160	150
Material Hardness	SAE 1035 - 1050 Steel									
	Rockwell C38 - 45									
	ANSI B18.22.1									

Peco Fasteners specification sheets are a reference guide to help in the selection of fasteners. Peco has made every effort to ensure the accuracy of the information. However, Peco Fasteners is not responsible for any errors that may be contained within these sheets. Peco Fasteners makes no claim of warranty in the accuracy of this information. Users of this information are solely responsible for protecting themselves against liability. It is solely the responsibility of the purchasers and users of these fasteners to consult with Engineers that are experts in an applicable field. Peco Fasteners is not responsible for any loss, claim, or damage due to these specification sheets.