

PS4-11-15D2

Square steel poles drilled for 2 Area Lights at 180°. Designed for ground mounting. Poles are stocked nationwide for quick shipment. Protective packaging ensures poles arrive at the job site good as new.

Color: Bronze

Weight: 106.0 lbs

Lamp Info

Type: N/A
Watts: 0W
Shape/Size: N/A
Base: N/A
ANSI: N/A
Hours: 0
Lamp Lumens: 0
Efficacy: N/A

Ballast Info

Type: N/A
120V: N/A
208V: N/A
240V: N/A
277V: N/A
Input Watts: 0W
Efficiency: N/A

Technical Specifications

CSA Listed:

Suitable for wet locations.

Shaft:

46,000 p.s.i. minimum yield.

Hand Holes:

Reinforced with grounding lug and removable cover.

Base Plates:

Slotted base plates 36,000 p.s.i.

Shipping Protection:

All poles are shipped in individual corrugated cartons to prevent finish damage.

Color:

Bronze powder coating.

Terms of Sale:

Pole Terms of Sale is available .

Height:

15 FT.

Weight:

106 lbs.

Gauge:

11

Wall Thickness:


1/8".

Shaft Size:

4".

Hand Hole Dimensions:

3" x 5".

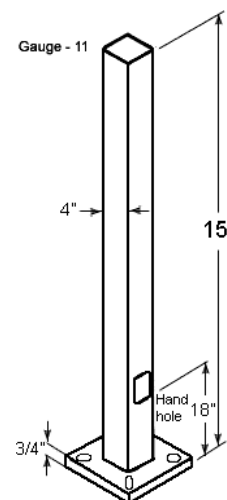

Bolt Circle:

8-9".

Base Dimension:

8".

Anchor Bolt:

Galvanized anchor bolts and galvanized hardware and anchor bolt template. All bolts have a 3" hook.

Anchor Bolt Templates:

WARNING Template must be printed on 11" x 17" sheet for actual size. CHECK SCALE BEFORE USING. Templates shipped with anchor bolts and available .

Pre-Shipped Anchor Bolts:

Bolts can be pre-shipped upon request for additional freight charge.

MaxEPA's/Max Weights:

70MPH 14.0 ft_/400 lb
80MPH 10.2 ft_/295 lb
90MPH 7.6 ft_/220 lb
100MPH 5.6 ft_/165 lb
110MPH 4.2 ft_/125 lb
120MPH 3.0 ft_/95 lb
130MPH 2.1 ft_/70 lb
140MPH 1.4 ft_/50 lb
150MPH 0.8 ft_/35 lb.